

## SPECIFICATIONS

### Electrical


UL Applications: 250 Volts AC MAX, AT 2 AMPS  
 Dielectric Withstanding Voltage: 1000 Volts AC  
 Withstand Voltage Time: 60 S  
 Insulation Resistance: 100 MΩ  
 Termination Resistance: 20 MΩ MAX after  
 Environmental Testin

### Mechanical

Cable-to-Plug Tensile Strength: 20 pound min.  
 Durability : 200 Mating cycles

### Material

Housing: Polycarbonate, UI94V-0 or UL94V-2  
 Color: Transparent or other color are available  
 Contact Blade: Copper Alloy  
 Conductor : Stranded & Solid wire, 24 AWG, 26 AWG  
 (It can be used for the Wire od from  $\phi 0.96 \sim \phi 1.02$ )  
 Gold Plating: 3U" ~ 50u", are available  
 Shielded Shell: Copper alloy  
 0-35  
 Shaded Area Signifies Copper Material

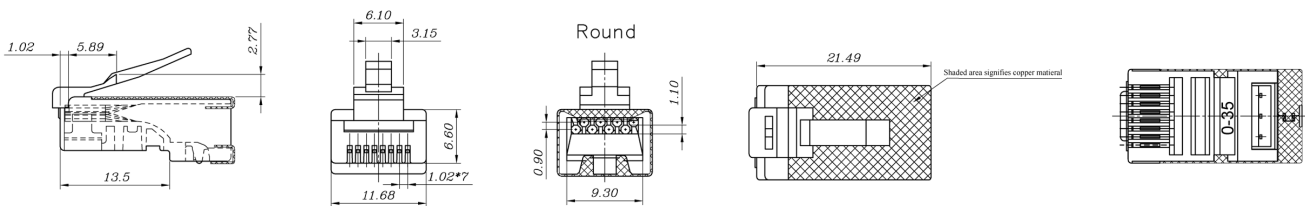

## PART NUMBER

6650R

Category 6 Shielded Mdular Plugs