



FEATURES

- PCB Panel
- CAT6 ISO11801 OR TIA/EIA 568C
- IDC compatible with 110 & KRONE tool
- Terminating 4 pairs, 22-26 AWG cable
- Colour coded for T568A and T568B wiring schemes
- Constructed of 4X6 port modules
- Horizontal Patch


MATERIAL

Panel	SPCC, 1.5 mm thickness painted black (RAL 9005)
RJ45 Jack Housing	PBT
RJ45 Jack Contact	Phosphor bronze, Nickel plated, Gold plated on plug contact area
IDC Housing	PC
IDC Terminal	Terminal: Phosphor bronze, Tin plated
PCB	FR4, Thickness: 1.6 mm

PERFORMANCE

Wiring specification	T568A & T568B
Insertion force	20N max
Retention strength	7.7 kg. between Jack and Plug
Operating temperature	-20°C to 60°C
Life (mating cycles)	Jack: 750 cycles min
IDC tool	AWG solid wire, compatible with 110 & KRONE punchdown tools
Size	482.6x44.5 x 89 MM (1U)

CATEGORY 6 UNSHIELDED 24 PORT PATCH PANEL

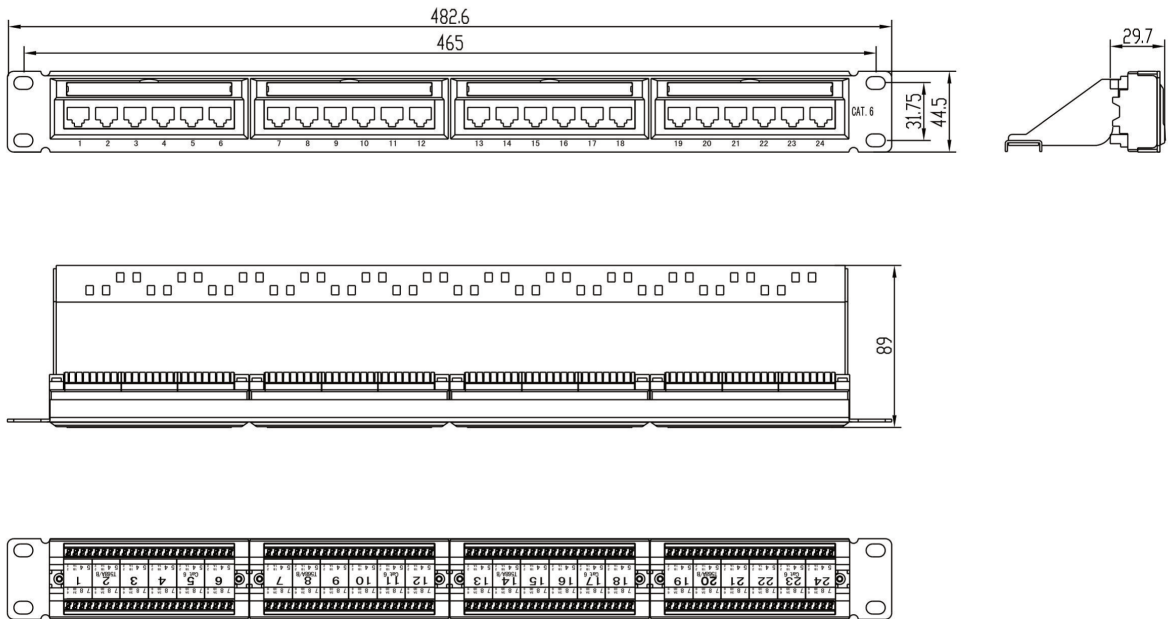

PART NUMBER

602424

Category 6 Unshielded 24 Port Patch Panel with Cable Manager